




15.1 Right- angled reject system

Right- angled reject system can be actuate electromechanically or elettropneumatically. It's function is to translate laterally (90°) the total or partial product flow incoming from other line.

Kinematic can be highest or lower than product flow in relationship to the type of conveyors which system will be installed.

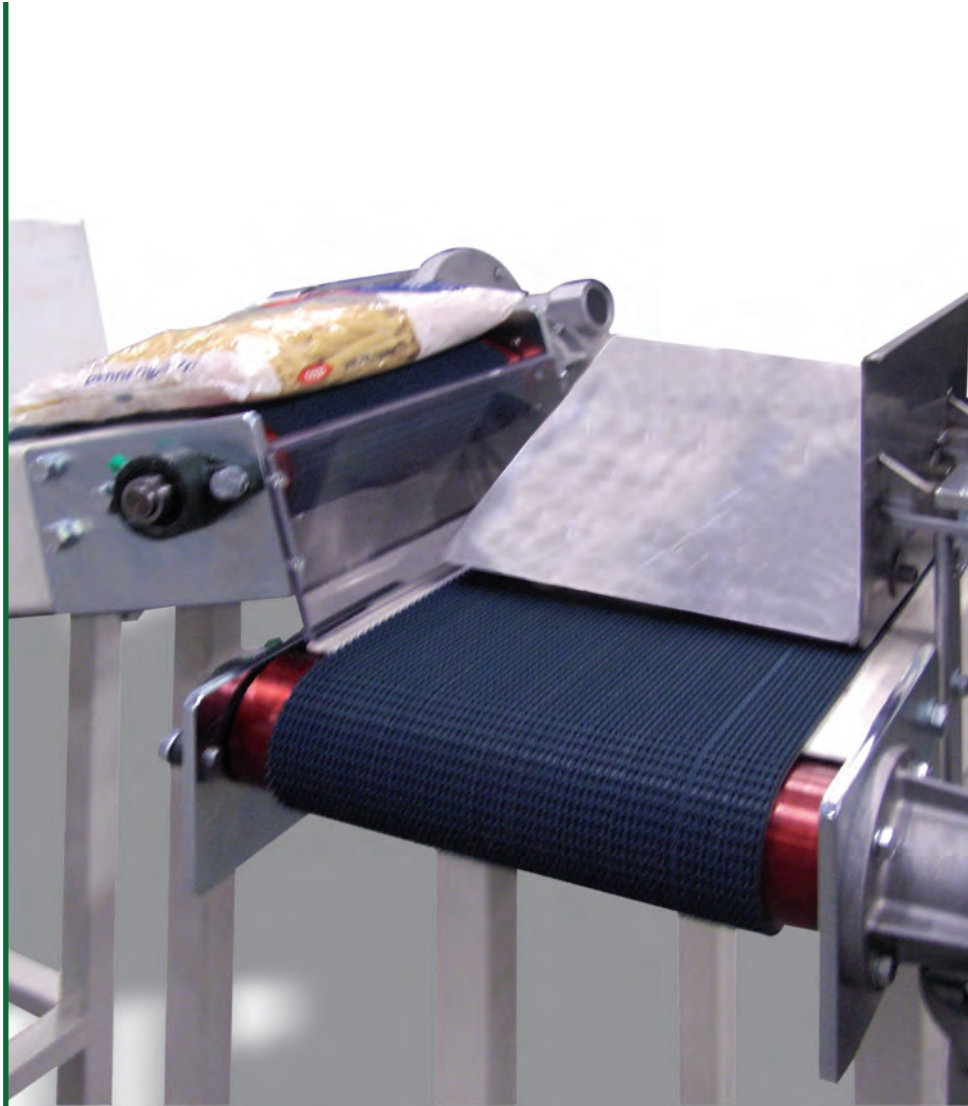

TECHNICAL DATES

HANDLED PRODUCT TYPE:

HANDLED PRODUCT SIZE:

REJECT TYPE:

Cartons, bundles, thermoretractable materials.

Minimum 150mm X 100mm

Maximum 600mm x 800mm.

Electromechanical

Electropneumatic

