



4.1 "Table-top" modular chain conveyors

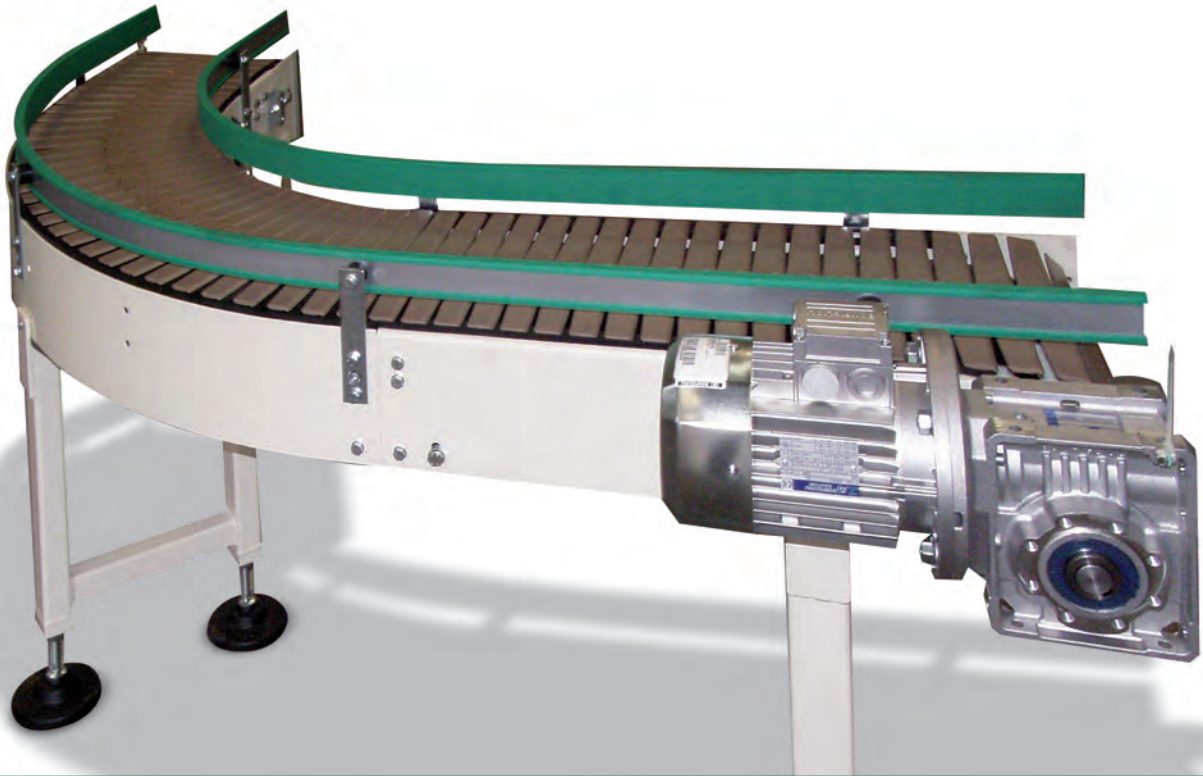


Table-top conveyors width are fixed and there are choices in relation of handled product type (150,200,250 e 300 mm).

Table-top conveyors may have direct motorization (keyed on shaft) or return motorization means by sprocket and chain or pulleys and belts. May have various type of motorization: in terminal part, central part, arc solution ecc...

Table-top conveyors can be unidirectional or bidirectional.

The chain can have high or low friction coefficient, accumulation rollers and suitable for food industries.

The machinery can be formed by painted steel, electro-zincify steel, stainless steel and aluminium.

TECHNICAL DATES

HANDLED PRODUCT TYPE:
HANDLED PRODUCT SIZE:

Cartons, bundles, thermoretractable materials.

Minimum 50mm x 100mm

Maximum 300mm x 400mm

MAXIMUM SPEED:

Up to 35 mt/min

