




7.1 Idle roller curves and motor-driven curves of 45°, 90° and 180°

Idle roller curves can have roller's diameter and step different type depending the handling product type, from minimum Ø32/52 mm to maximum Ø60/105 mm. They can be motorized by chain and belt or at ring disposition. Idle roller curves can be unidirectional or bidirectional. The machinery can be formed by painted steel, electro-zincify steel, stainless steel and aluminium.

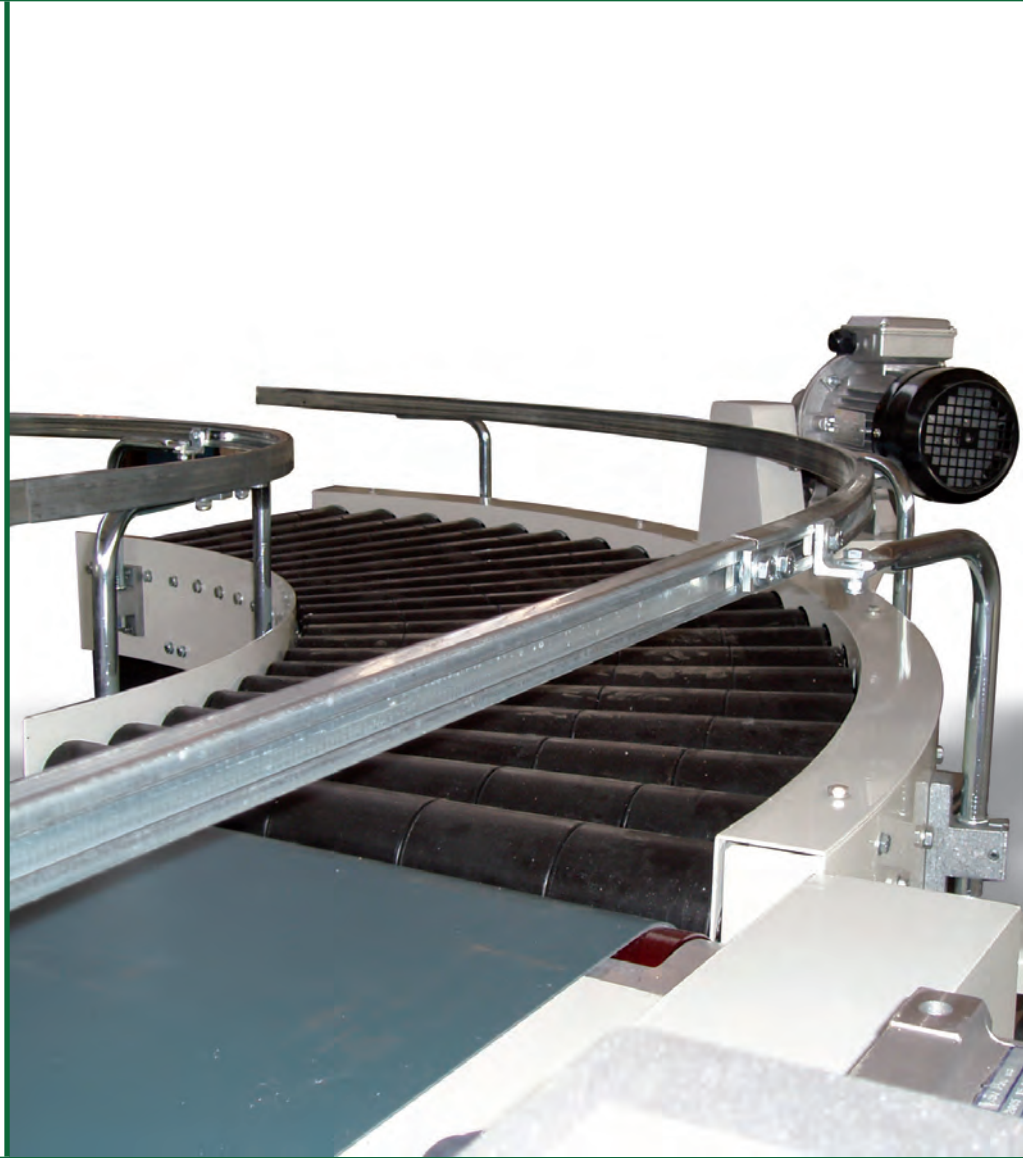

TECHNICAL DATES

HANDLED PRODUCT TYPE:
HANDLED PRODUCT SIZE:

MAXIMUM SPEED:

Cartons, bundles, thermoretractable materials.
Minimum 200mm x 300mm
Maximum 600mm x 800mm
Up to 40 mt/min

