






17.1 Conveyor belts

Motorized belts conveyor may have direct motorization (keyed on shaft) or return motorization means by sprocket and chain or pulleys and belts. May have various type of motorization: in terminal part, central part, arc solution ecc...

Belt conveyor can be unidirectional or bidirectional. The mat can have high or low friction coefficient, can be cut-resistant and suitable for food industries.

The conveyors can have traditional pulley of driving and referral or end pen conveyors pulley Ø20 mm.

The machinery can be formed by painted steel, electro-zincify steel, stainless steel and aluminium.

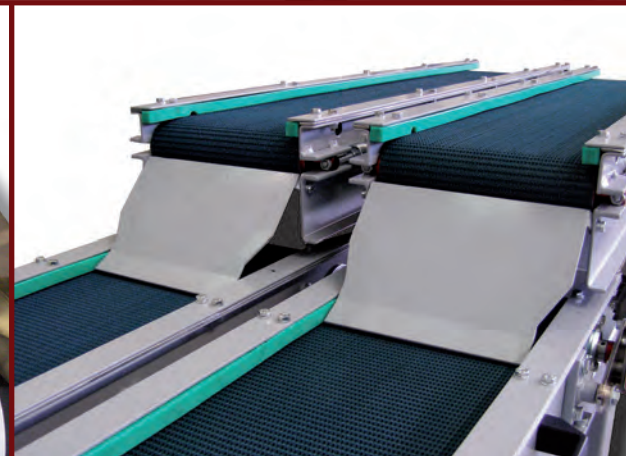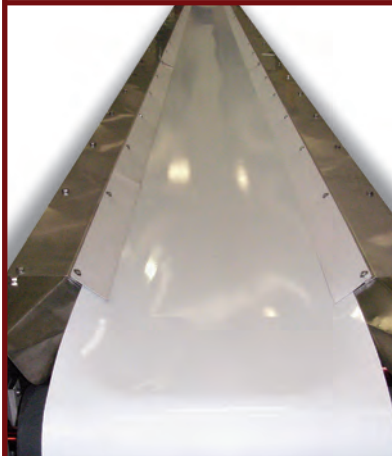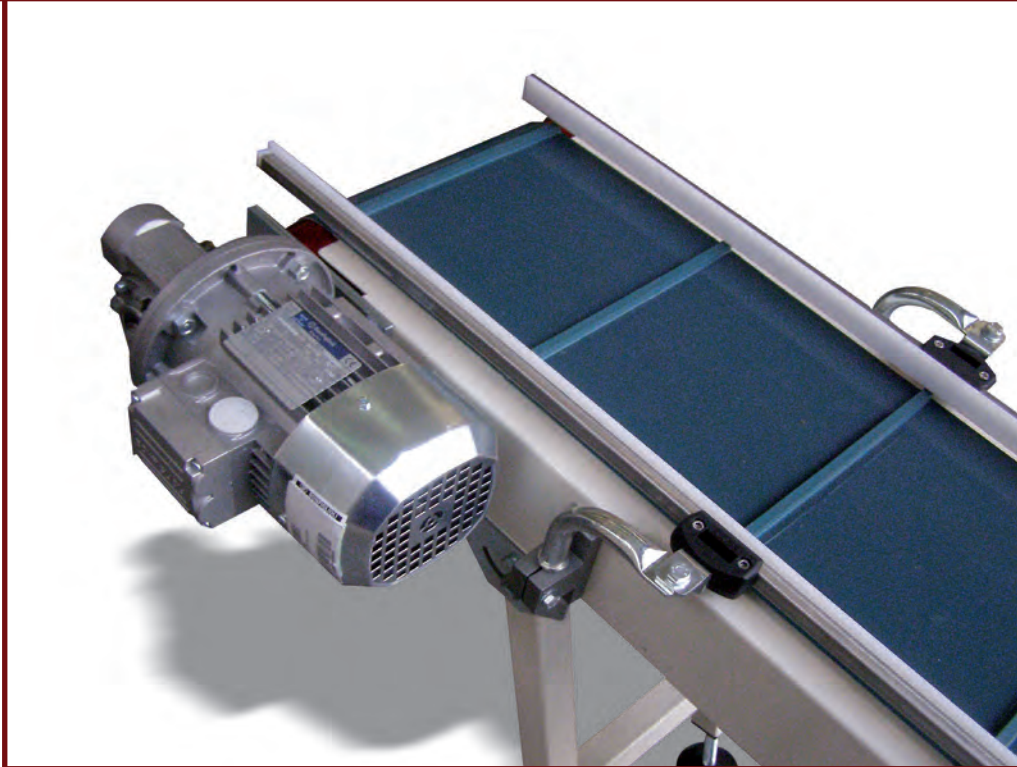

TECHNICAL DATES

HANDLED PRODUCT TYPE:
HANDLED PRODUCT SIZE:

MAXIMUM SPEED:

Envelopes, tines, recipients, jars, bottles.
Minimum 100mm X 50mm
Maximum 200mm x 150mm.
Up to 50mt/min

