




## 31.1 Conveyor belts

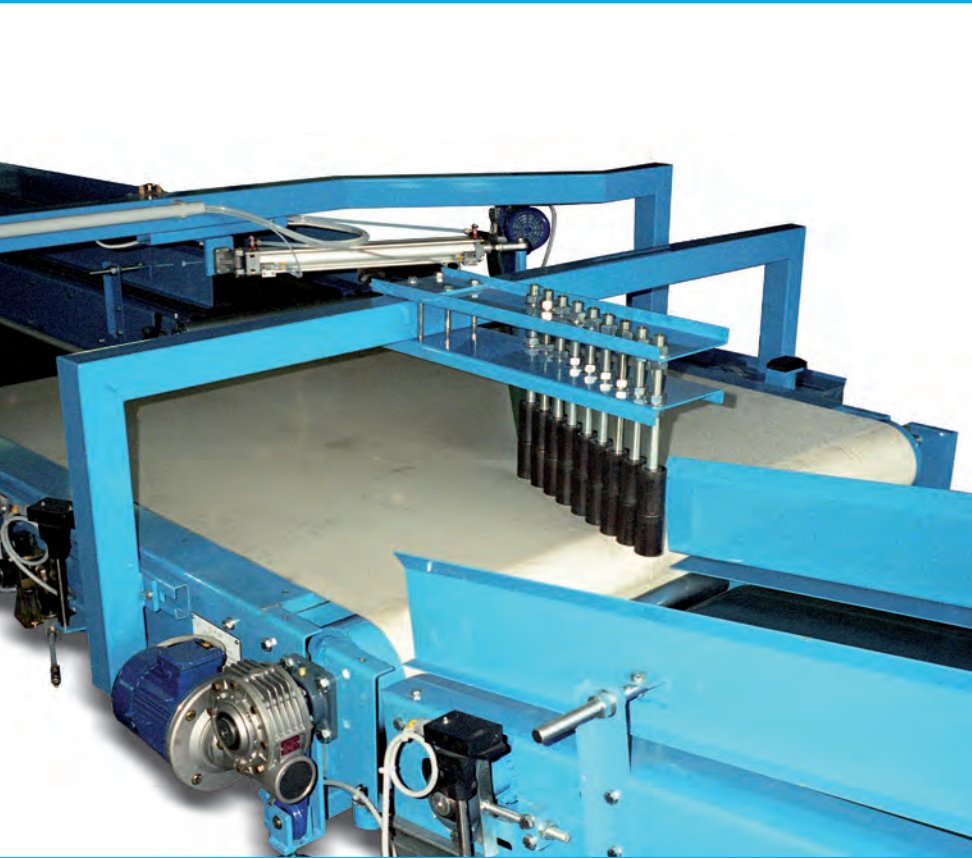

Motorized belts conveyor may have direct motorization (keyed on shaft) or return motorization means by sprocket and chain or pulleys and belts. May have various type of motorization: in terminal part, central part, arc solution ecc.

Belt conveyor can be unidirectional or bidirectional.

The mat can have high or low friction coefficient, can be cut-resistant and suitable for food industries.

The conveyors can have traditional pulley of driving and referral or end pen conveyors pulley Ø20 mm.

The machinery can be formed by painted steel, electro-zincify steel, stainless steel and aluminium.

### TECHNICAL DATES

**HANDLED PRODUCT TYPE:**

Barrels and sacks

**HANDLED PRODUCT SIZE:**

Sacks: Minimum 300mm X 500mm  
Maximum 400mm x 600mm.

**MAXIMUM SPEED:**

Barrels: up to 200 liters  
Up to 35 mt/min

