




## 35.1 Cable conveyors

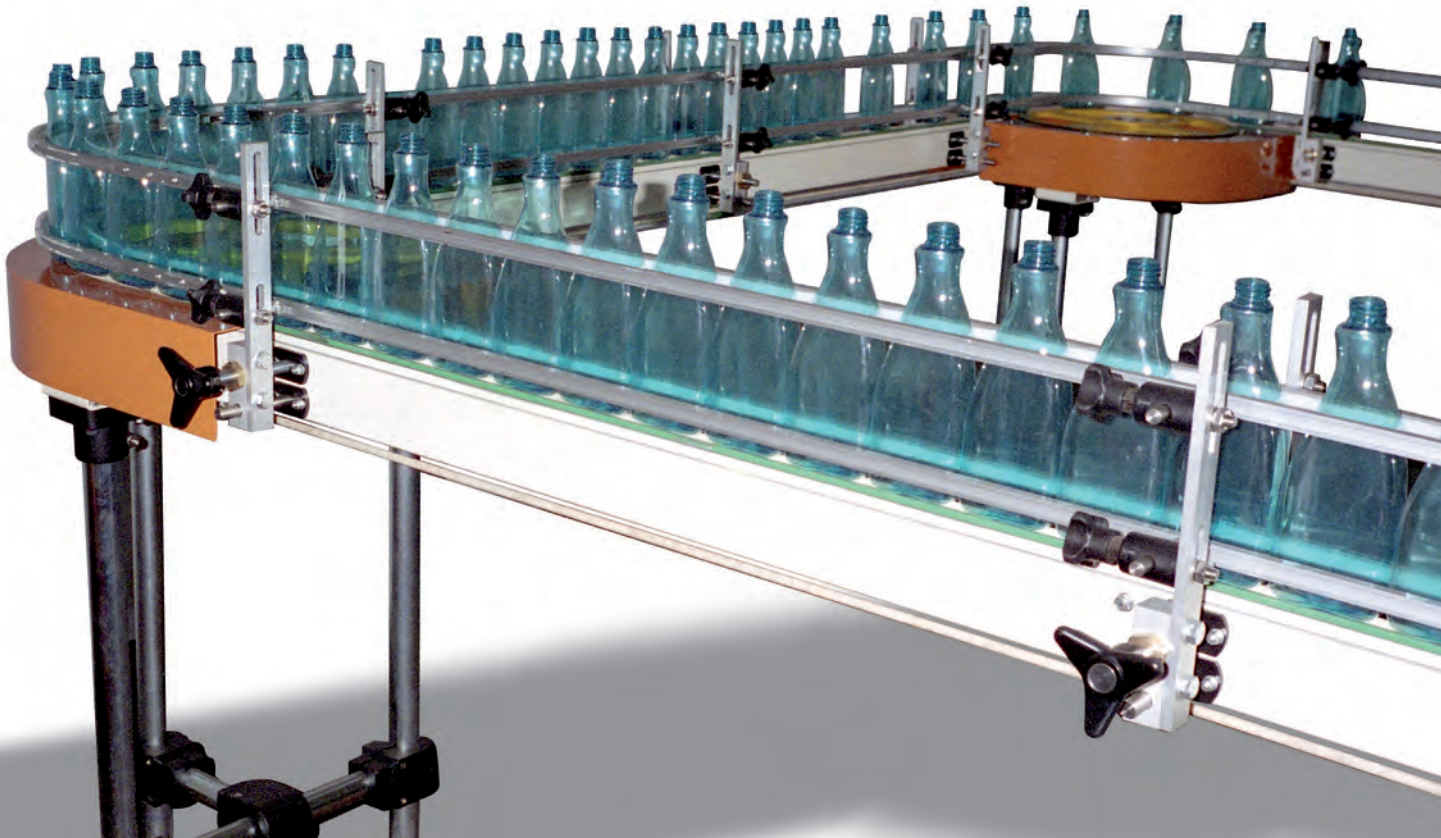

Cable conveyors are suitable to move tins with and without bottom.  
The cable can be plied, covered or with core in kevlar.  
Cable conveyors may have direct motorization (keyed on shaft) or return motorization means by sprocket or pulleys.  
The machinery can be formed by painted steel, electro-zincify steel and stainless steel.

### TECHNICAL DATES

**HANDLED PRODUCT TYPE:**

Barrels and sacks

**HANDLED PRODUCT SIZE:**

Sacks: Minimum 300mm X 500mm  
Maximum 400mm x 600mm.

**MAXIMUM SPEED:**

Barrels: up to 20 liters  
Up to 60 mt/min

